

MonoX™ Black

LG265S1K-A3 / LG260S1K-A3 / LG255S1K-A3 / LG250S1K-A3



LG Electronics, Inc. (Korea Exchange: 06657.KS) is one of the globally leading companies and technology innovator for electronics, information and communication products. LG Electronics currently employs more than 91,000 people worldwide in 117 companies. In fiscal year 2011 a turnover of 48,97 billion USD has been achieved.

LG is one of the world's largest manufacturers of mobile phones, flat screen TVs, air conditioners, washing machines and refrigerators. As a future-oriented company, LG relies on the technology of renewable energies and is expanding it. The entire range of high quality solar products are being manufactured in LG's leading production site South Korea.



The LG Mark of Excellence

Customers rest assured of cutting-edge technology and reliability when they see the LG logo on every module. The LG logo reflects the high standards that have guided LG for more than 50 years.



100% EL Test Completed

All LG modules are tested at various stages of the production by Electroluminescence inspection. The EL inspection detects cracks unseen by the naked eye.



Light and Robust

With a weight of just 16.8 kg, LG modules are proven to demonstrate outstanding durability against external pressure up to 5400 Pa.



Reliable Warranties

LG stands by its products with the strength of a global corporation and sterling warranty policies. Together with a 10 year product warranty a 25 year linear performance warranty is offered.



Positive Power Tolerance

LG provides rigorous quality testing to solar modules to assure customers of the stated power outputs of all modules, with a positive nominal tolerance starting at 0%.



Convenient Installation

LG modules are carefully designed to help installers benefit from quick and easy installations throughout carrying, grounding, and connecting stages of modules.

MonoX™ Black

LG265S1K-A3 / LG260S1K-A3 / LG255S1K-A3 / LG250S1K-A3

Mechanical Properties

Cells	6 x 10
Cell vendor	LG
Cell type	Monocrystalline
Cell dimensions	156 x 156 mm ²
Cell busbars	3
Front cover	High transmission tempered glass
Dimensions (L x W x H)	1640 x 1000 x 35 (mm)
Static load	5400 Pa (snow) 2400 Pa (wind)
Weight	16.8 ± 0.5 kg
Connector type	MC4, IP 67
Junction box	IP 67 with 3 bypass diodes
Length of cables	2 x 1000 mm
Frame	Anodized aluminum

Certifications and Warranty



Certifications	IEC 61215, IEC 61730-1/-2, IEC 61701 DLG-FokusTest Ammonia Resistance ISO 9001, ISO 14001, OHSAS 18001 UL 1703
Product warranty	10 years
Output warranty of Pmax (Measurement Tolerance ± 3%)	25 years linear warranty ¹

¹ 1st year: 97%, 2nd - 25th year: -0.7%/a, 25th year: 80.2%

Temperature Coefficients

NOCT	47.0 ± 2 °C
Pmpp	-0.44 %/K
Voc	-0.31 %/K
Isc	0.05 %/K

Characteristic Curves

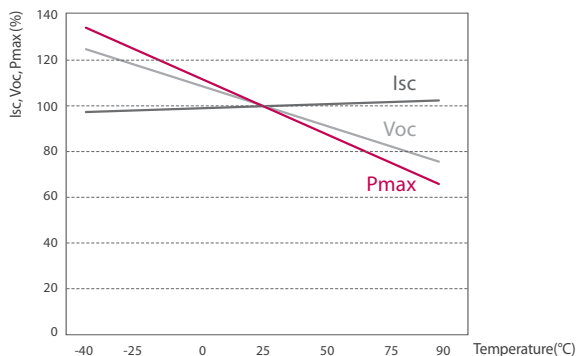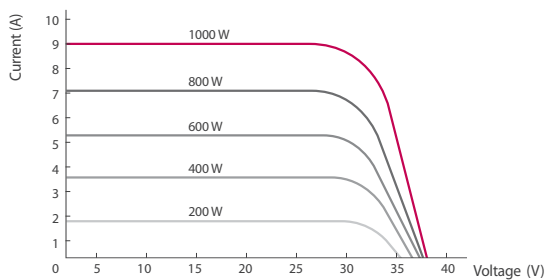

Electrical Properties (STC²)

	265S1K-A3	260S1K-A3	255S1K-A3	250S1K-A3
Maximum power Pmax (W)	265	260	255	250
MPP voltage Vmpp (V)	31.5	31.2	30.9	30.8
MPP current Impp (A)	8.42	8.34	8.26	8.13
Open circuit voltage Voc (V)	38.4	38.2	37.9	37.6
Short circuit current Isc (A)	9.03	8.88	8.78	8.68
Module efficiency (%)	16.2	15.9	15.5	15.2
Operating temperature (°C)	-40 ~ +90			
Maximum system voltage (V)	1000			
Maximum series fuse rating (A)	15			
Power tolerance (%)	0 ~ +3			

² STC (Standard Test Condition): Irradiance 1000 W/m², module temperature 25 °C, AM 1.5

Application Class: A (according to IEC 61730), Safety Class: II


The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

Electrical Properties (NOCT³)

	265S1K-A3	260S1K-A3	255S1K-A3	250S1K-A3
Maximum power Pmax (W)	192	189	185	182
MPP voltage Vmpp (V)	28.6	28.3	28.1	28.0
MPP current Impp (A)	6.72	6.66	6.59	6.49
Open circuit voltage Voc (V)	35.3	35.1	34.8	34.6
Short circuit current Isc (A)	7.30	7.18	7.10	7.02
Efficiency reduction (from 1000 W/m ² to 200 W/m ²)	< 4.5 %			

³ NOCT (Nominal Operating Cell Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s

Dimensions (mm)

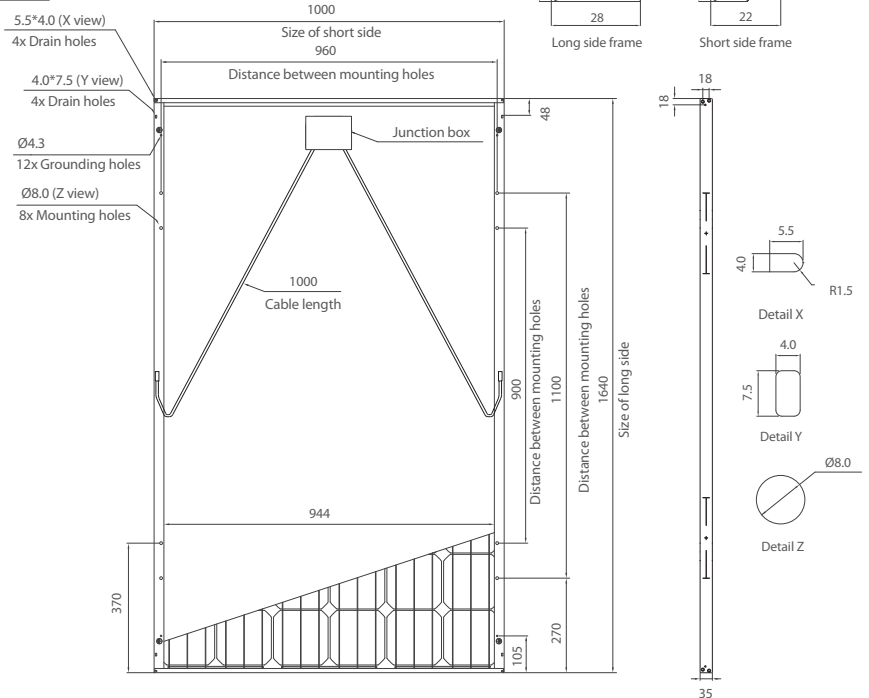

The distance is between the center of the mounting/grounding wholes.



LG
Life's Good

LG Electronics Deutschland GmbH
EU Solar Business Group
Berliner Straße 93
40880 Ratingen, Germany
Email: solar@lge.de

www.lg.com/uk/solar

All specifications of this data sheet comply with DIN EN 50380.
Subject to change without notice.
Status: 01/2014
Document: DS-S1K-A3-EN-201401

Copyright © 2014 LG Electronics. All rights reserved.

